


Reported Issue:

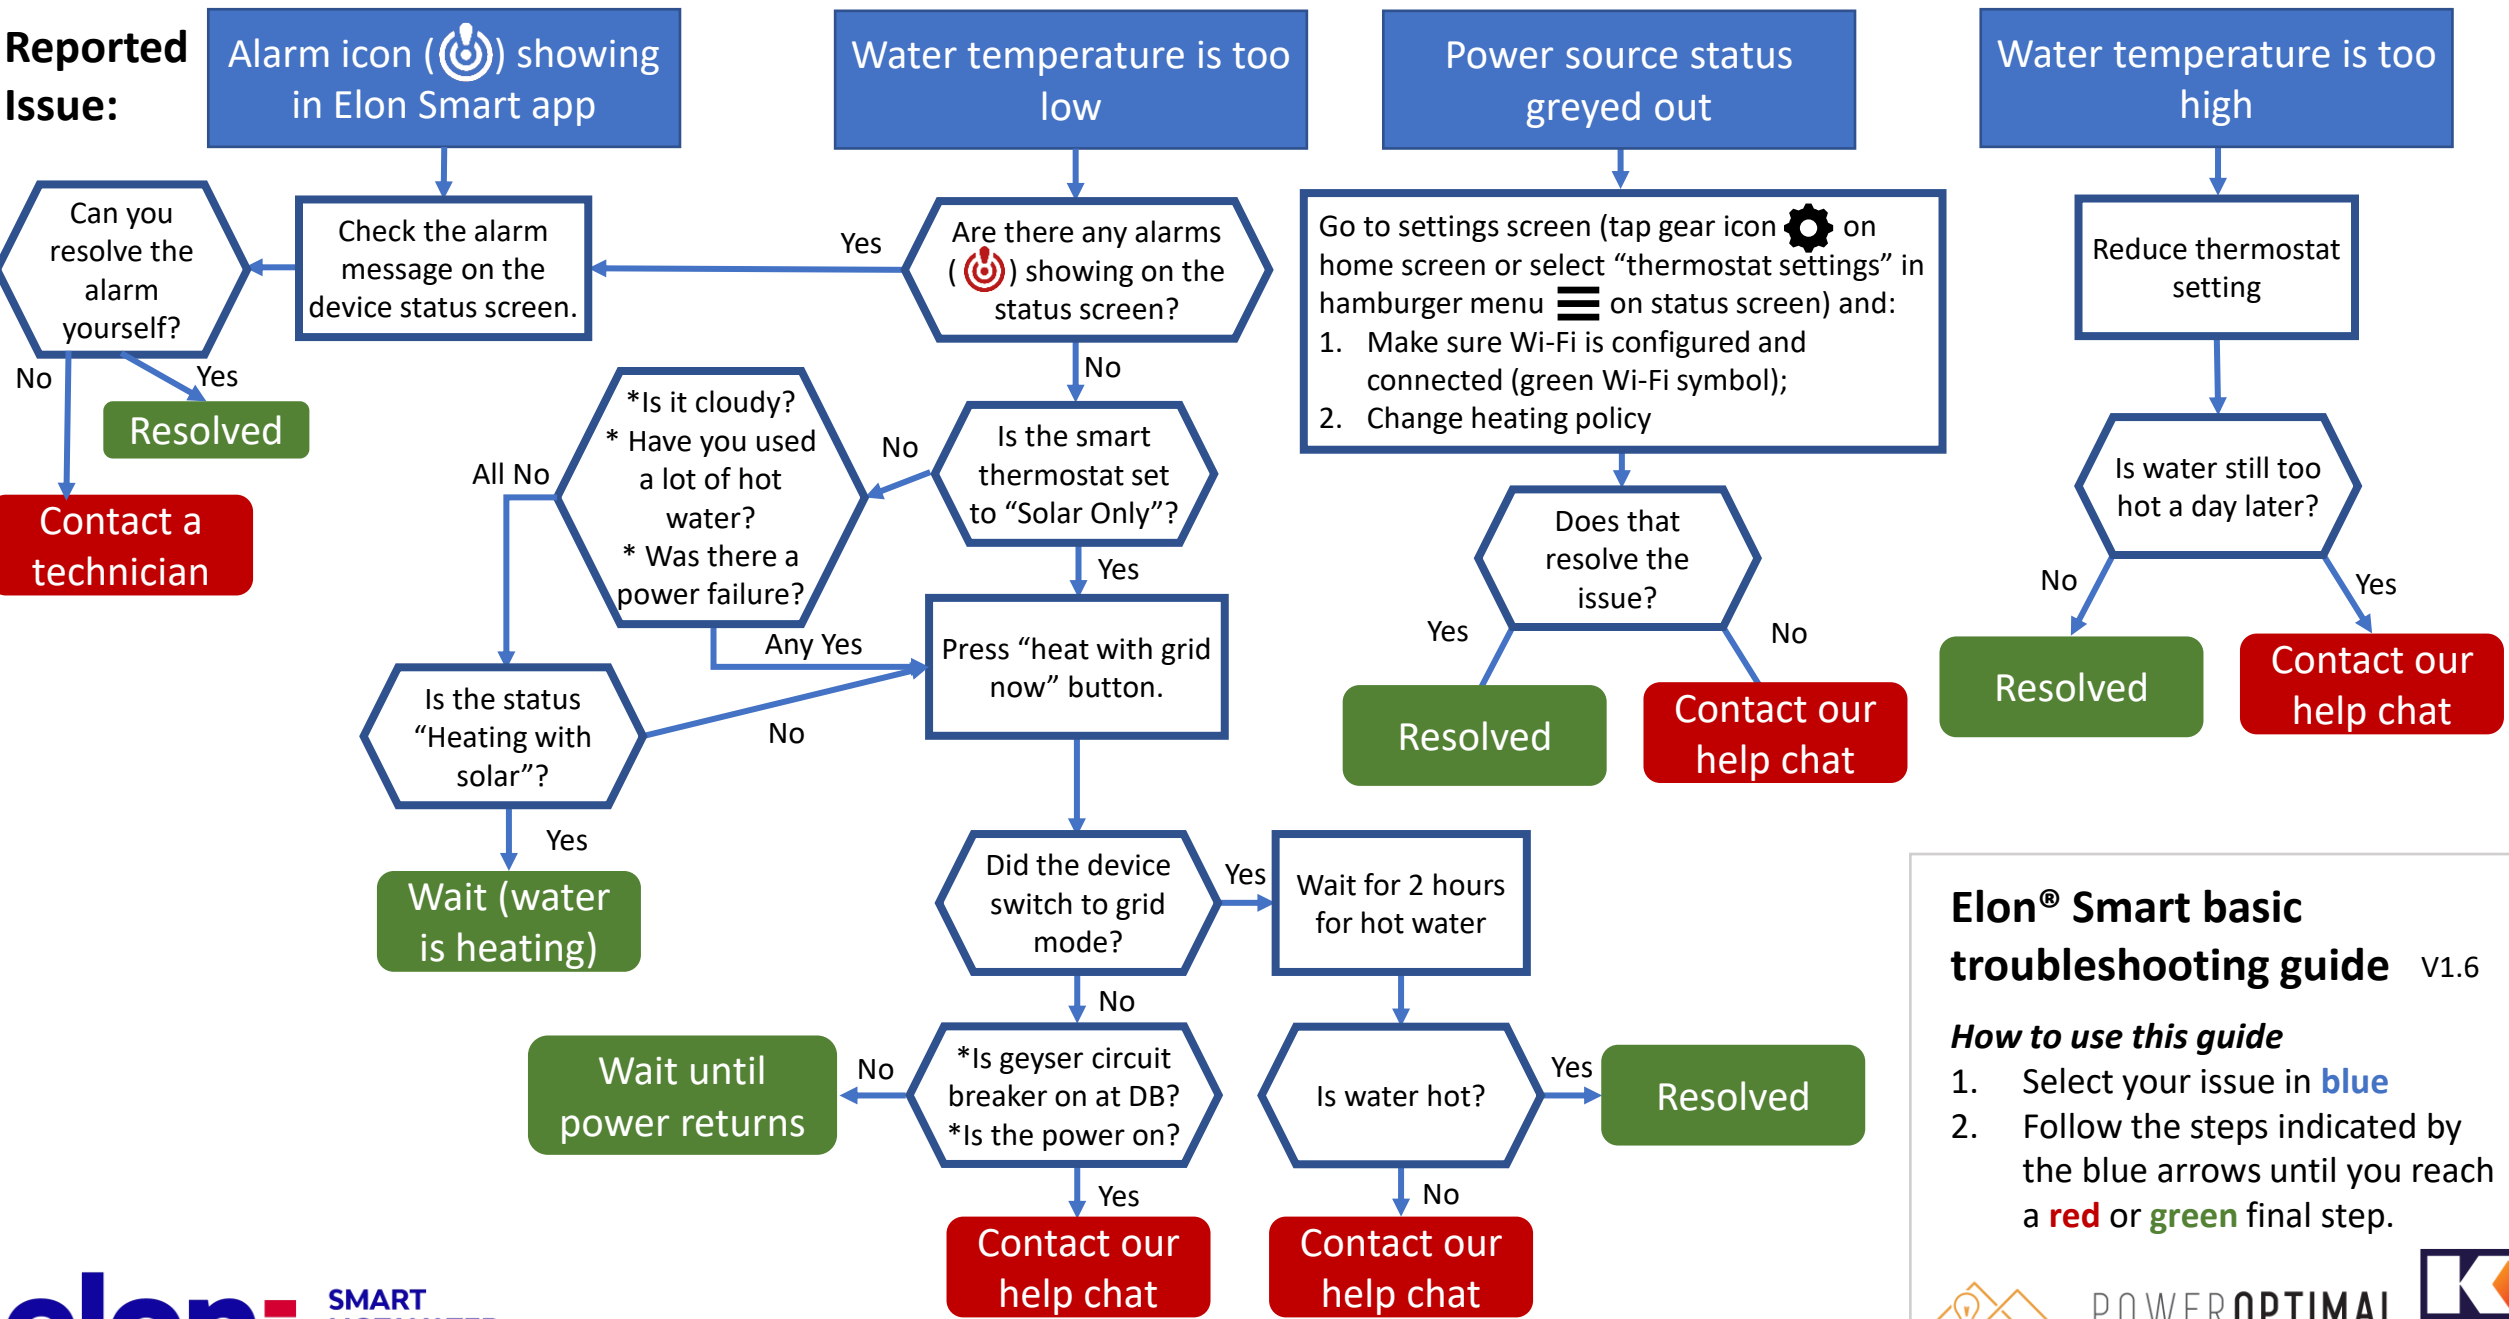

Elon® Smart basic troubleshooting guide

V1.6

How to use this guide

1. Select your issue in **blue**
2. Follow the steps indicated by the blue arrows until you reach a **red** or **green** final step.




SMART HOT WATER SYSTEM


THE FUTURE OF ENERGY

powered by Haier

Reported Issue:

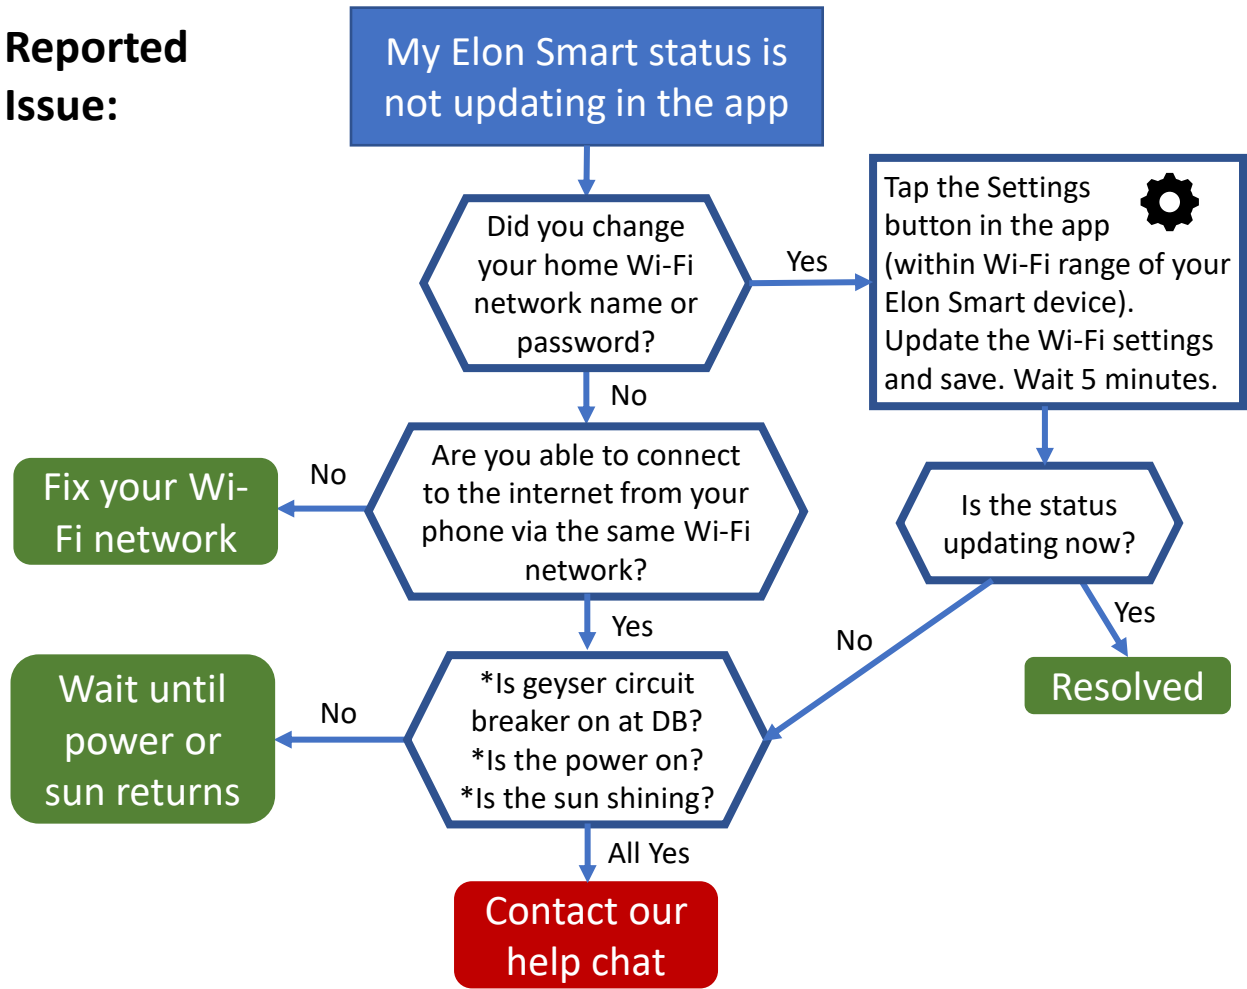


Can't connect to my Elon Smart with my phone (via the Settings button or the "Thermostat settings" menu item)

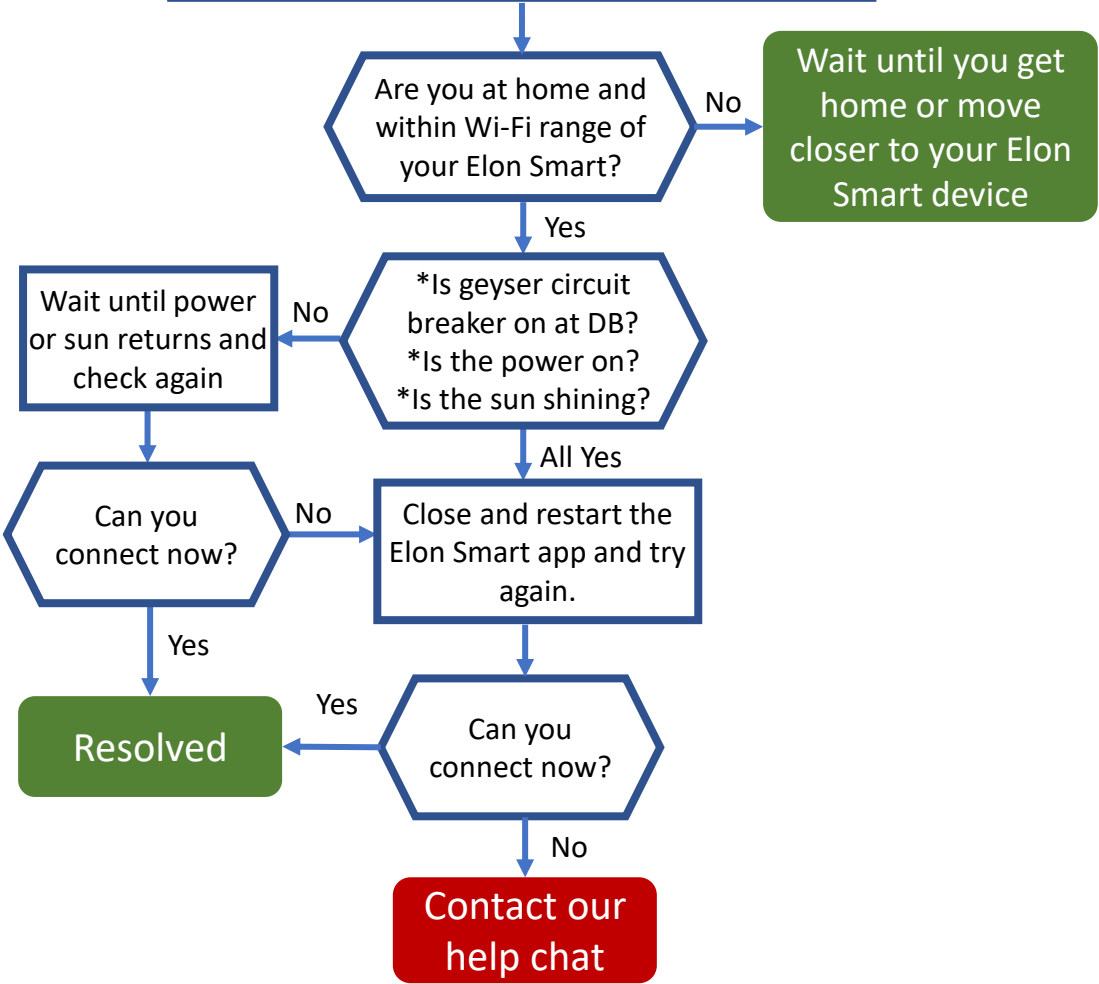


Reported Issue:

1. The Elon Smart unit might be out of range of your Wi-Fi network. If you can, reposition your Wi-Fi router closer to your geyser. Otherwise, you might need to get a Wi-Fi extender or booster.
2. Check that your Wi-Fi router is not set to only the 5 GHz band, but also the 2.4 GHz band.

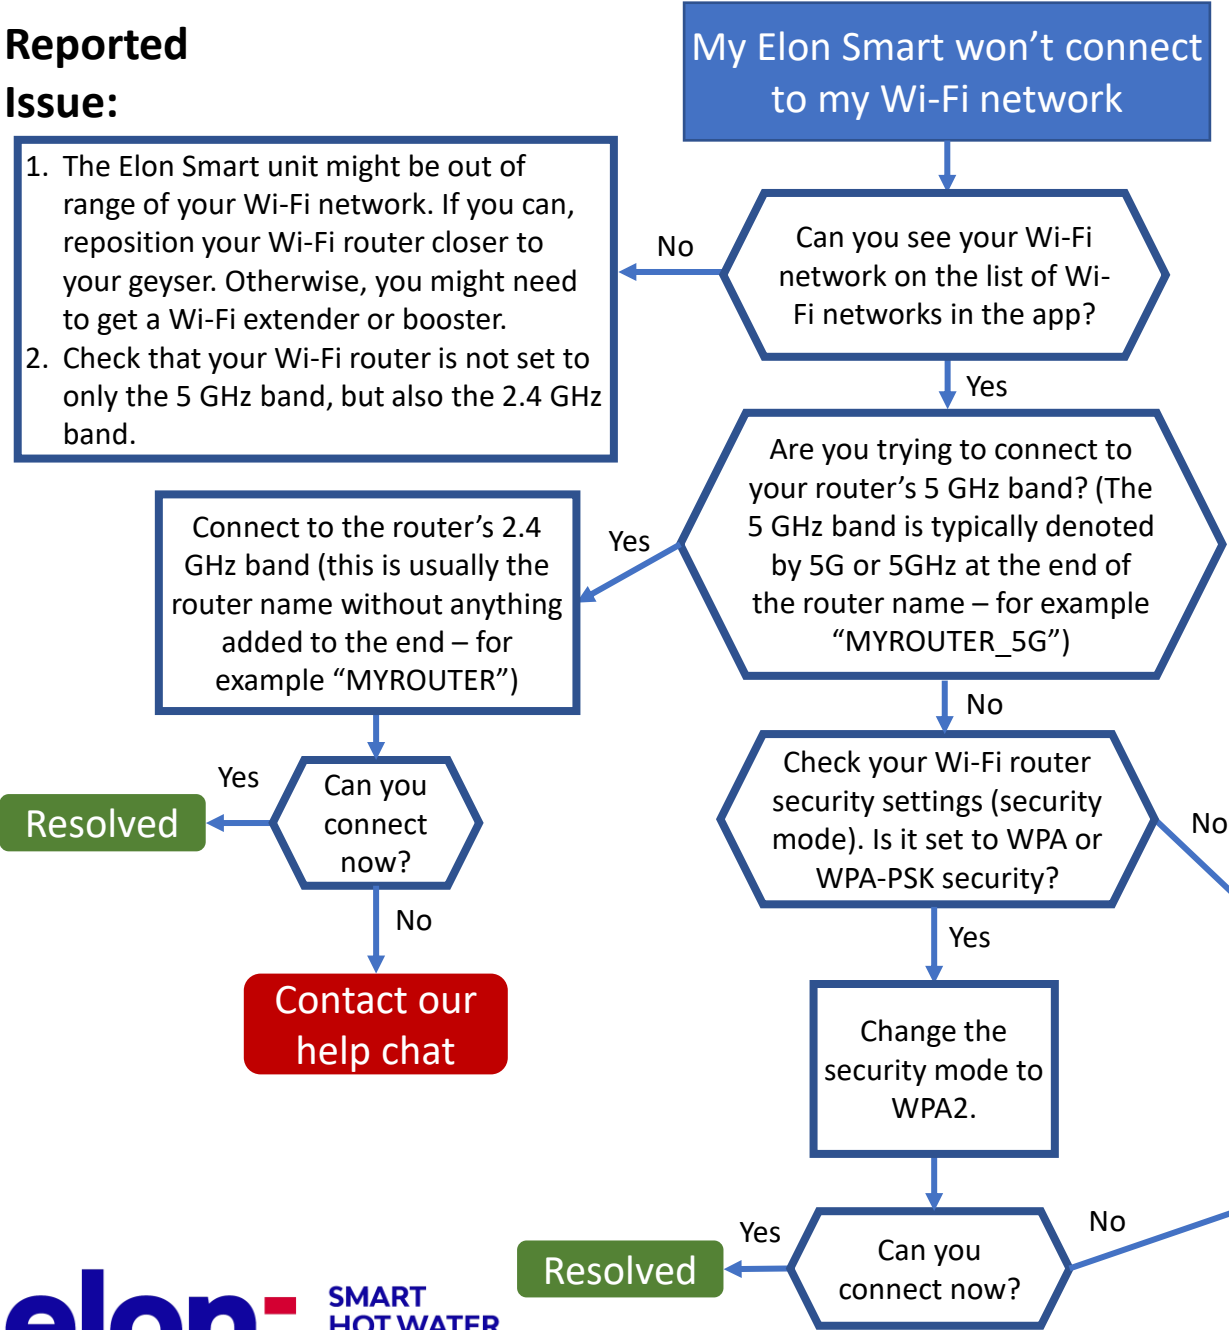


"Unhandled exception querying device" error

- 5 things to try:**
1. Delete the geyser in the app and rescan the QR code;
2. Go to config screen and change heating policy;
3. Uninstall and reinstall the app;
4. Reboot the home Wi-Fi router
5. Switch off the geyser circuit breaker at the DB at night time, wait for 2 minutes and switch it on again (this will force the Elon Smart to reboot).

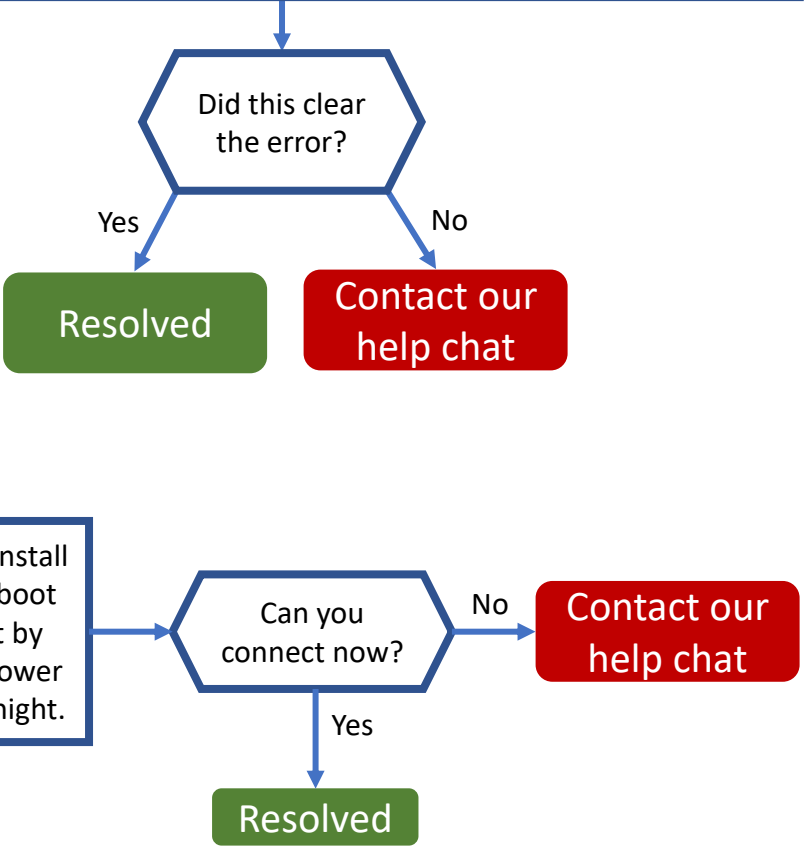

Reported Issue:

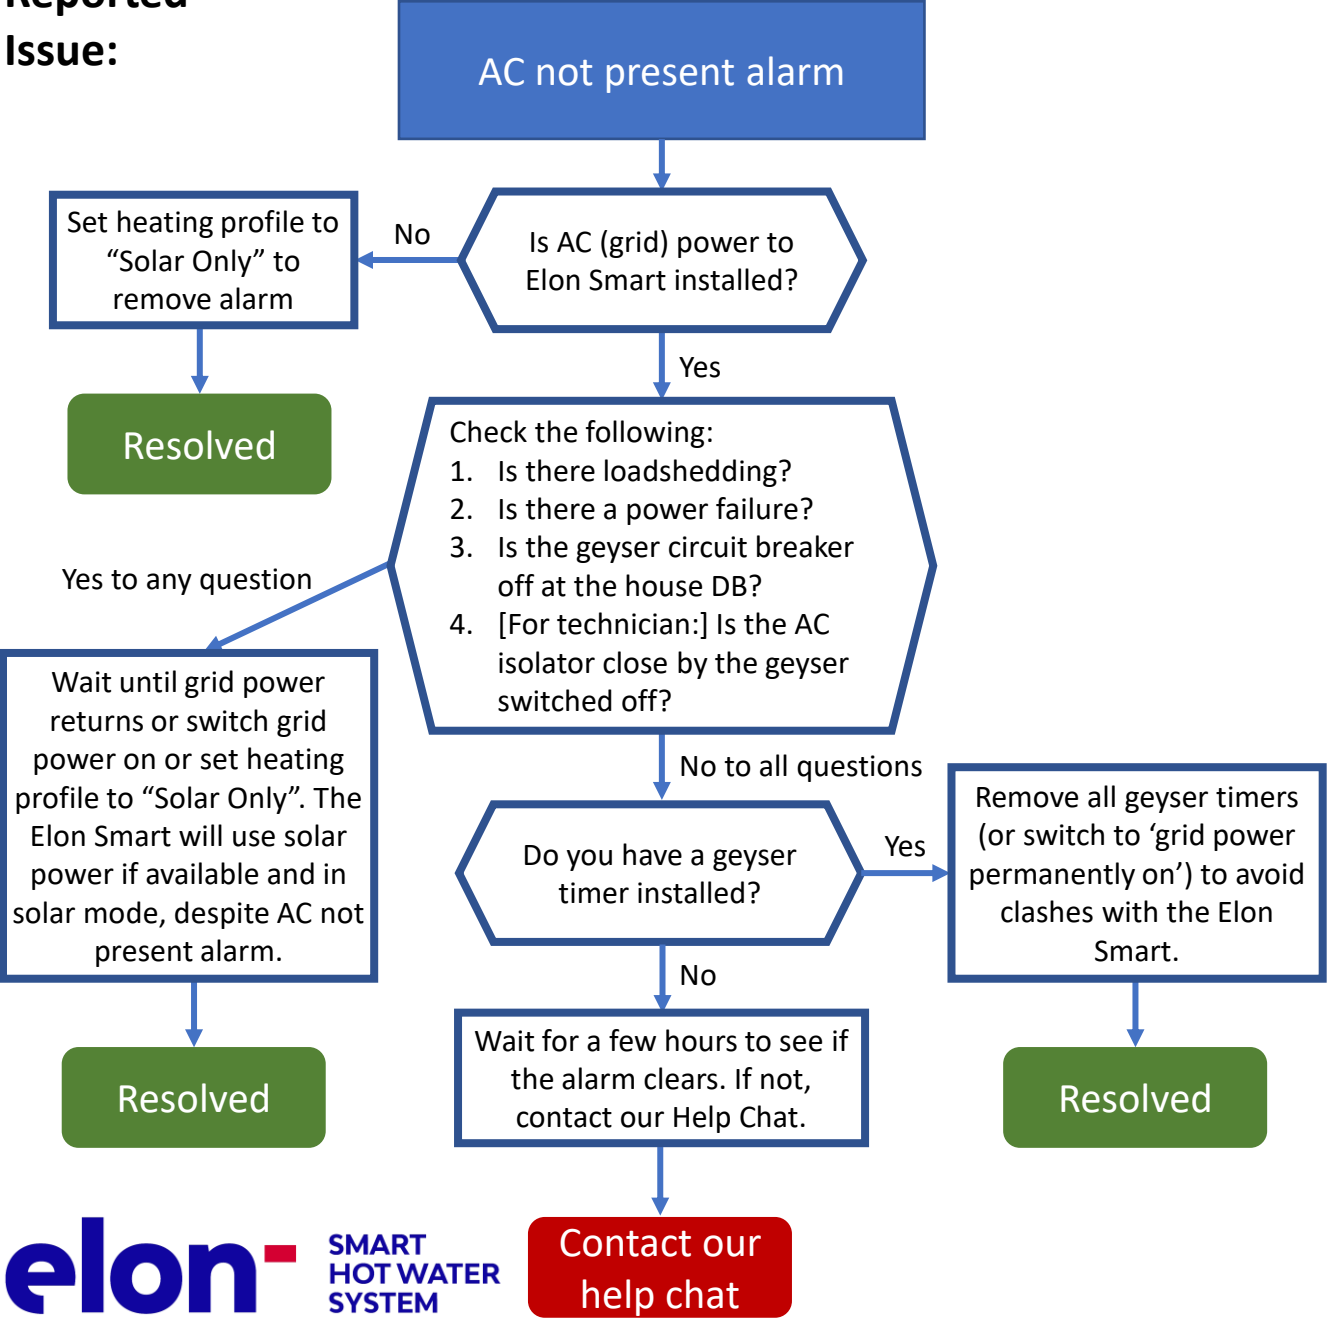

For installers: how to configure the Elon Smart when no home Wi-Fi is available

You can configure the Elon Smart by connecting directly to it as follows:


1. Scan the QR code to add the Elon Smart to the app.
2. Tap the gear icon on the home screen or select "Thermostat settings" in the menu on the status screen to access the thermostat settings.
3. Configure the thermostat as described in the installation manual (set name, address, temperature set points, heating profile). Skip the Wi-Fi configuration.

The Elon Smart will function without a Wi-Fi connection after configured, but the status screen in the app will not update.

If you want to see the status screen (graphs and temperature) update, provide a mobile Wi-Fi hotspot on a second phone (not the one that you're connecting to the Elon Smart with).

ID	Alarm message	How to resolve the alarm: USERS	How to resolve the alarm: TECHNICIANS / ELECTRICIANS
0	Element Faulty	Contact your installer / electrician	a. Check that the thermostat is inserted correctly. b. If that does not clear the alarm, measure element resistance and replace if necessary.
1	Switch Failed	Contact our help chat	Contact our help chat
2	DC Disconnect Failed	Contact our help chat	Contact our help chat
3	AC Not Present	<p>This can be due to several reasons:</p> <ul style="list-style-type: none"> a. There is no AC power connected to the Elon Smart b. AC power is off at the circuit breaker in the DB board or at the AC isolator close by the Elon Smart unit. c. There is a power failure or loadshedding. <p>This alarm won't prevent the Elon Smart unit from functioning and heating water with solar (DC) power as long as there is solar power available.</p> <p>You can clear the alarm by switching the AC power on (where applicable), setting the Elon Smart heating profile to <i>Solar Only</i> or you can leave it until AC power returns.</p>	See to the left
4	Measurement Failure	Contact our help chat	Contact our help chat
5	Disconnected for Safety	When there is a safety-related alarm condition, the Elon Smart will disconnect power from the geyser. To clear this alarm, you need to clear the other safety-related alarm(s).	See to the left
6	Water Temperature Measurement Failure	Contact our help chat	Contact our help chat
7	Ambient Temperature Exceeded	<ul style="list-style-type: none"> a. Check the installation. If the geyser is installed in direct sunlight, see if you can provide shade to the geyser end space area where the Elon Smart is located. b. Reduce temperature set point by 5 degrees. c. Wait until temperatures cool down. The Elon Smart will start up again. d. Contact our help chat if the above doesn't clear the alarm. 	See to the left

ID	Alarm message	How to resolve the alarm: USERS	How to resolve the alarm: TECHNICIANS / ELECTRICIANS
8	DC Wiring Insulation Failure	<p>Contact your installer / electrician.</p> <p>To operate the Elon Smart whilst the insulation fault has not been located and resolved, you can set the heating profile to <i>Grid Only</i> or switch off the DC disconnect switch.</p>	<p>a. Check solar panels and DC wiring for insulation faults.</p> <p>b. To operate the Elon Smart whilst the insulation fault has not been located and resolved, you can set the heating profile to <i>Grid Only</i> or switch off the DC disconnect switch.</p>
9	Insulation Self-Test Failed	Contact your installer / electrician	a. Check earth wiring. Make sure both earth straps are connected securely to the geyser earth stud.
10	AC Wired to DC Input	Contact your installer / electrician	Wire AC to correct input (see Chapter 4 in the Installation Manual).
11	DC Wired to AC Input	Contact your installer / electrician	Wire DC to correct input (see Chapter 4 in the Installation Manual).
12	DC Not Present	<p>This can be due to several reasons:</p> <ol style="list-style-type: none"> There is no DC power connected to the Elon Smart DC power is off at the DC disconnect switch close by the Elon Smart unit. There is an issue with the DC wiring or solar PV installation. It is extremely dark and overcast during daytime. (The alarm is not active when the sun is less than 15 degrees above the horizon.) <p>This alarm won't prevent the Elon Smart unit from functioning and heating water with grid (AC) power as long as there is grid power available.</p> <p>You can clear the alarm by:</p> <ol style="list-style-type: none"> Switching the DC power on (where applicable); Setting the Elon Smart heating profile to <i>Grid Only</i>; Leaving it until DC power returns; or Contacting your installer / electrician to inspect and fix the DC wiring and/or solar PV installation. 	See to the left
13	DC Input Reversed	Contact your installer / electrician.	<p>The wiring on the Solar input has been installed incorrectly (in reverse). The DC+ (positive) wire has been connected to the DC- (negative) terminal on the Elon Smart and the DC- (negative) wire has been connected to the DC+ (positive) terminal on the Elon Smart.</p> <p>Swap the DC wires around (see Chapter 4 in the Installation Manual).</p>
14	Hot Connection	Contact your installer / electrician.	Elon Smart not correctly inserted into geyser element. Switch off all power to the Elon Smart and re-seat (reinsert) the Elon Smart.

ID	Alarm message	How to resolve the alarm: USERS	How to resolve the alarm: TECHNICIANS / ELECTRICIANS
15	RTC Failed	Contact our help chat	Contact our help chat
16	Power Unstable	<ul style="list-style-type: none"> a. If it is intermittent or temporary and occurring during loadshedding or grid power failures, you can ignore this alarm. b. If the alarm persists whilst grid power is available, contact your installer / technician. 	<ul style="list-style-type: none"> a. Check that wiring to Elon Smart is properly connected and not loose. b. Check whether geyser circuit breaker in DB or the geyser's AC isolator are faulty or wiring is not properly connected. c. If none of the above are present, then contact our help chat.
17	Server Not Available	<ul style="list-style-type: none"> a. Check that your home Wi-Fi network has internet connectivity. b. Check the Elon Smart Wi-Fi settings on the thermostat settings screen (access by tapping the gear icon  in the app when at home). c. If your Wi-Fi router is far away from your geyser, the Wi-Fi signal might be too weak. This can be improved with a Wi-Fi extender or signal booster. d. If none of the above works, try rebooting your Elon Smart by switching off the geyser circuit breaker on your house DB board at night for 2 minutes. 	See to the left